

Wood Look

COLOR BODY • PORCELAIN



BEST  TILE® / BESTTILE.COM

Enchant

BEST





MYSTIC



DECORS



2.5x19 Listel Mosaic
on 10x19 Sheet
Matte

VARIATION



OASIS



BEST TILE

DECORS




2.5x19 Listel Mosaic
on 10x19 Sheet
Matte

VARIATION





SPARK

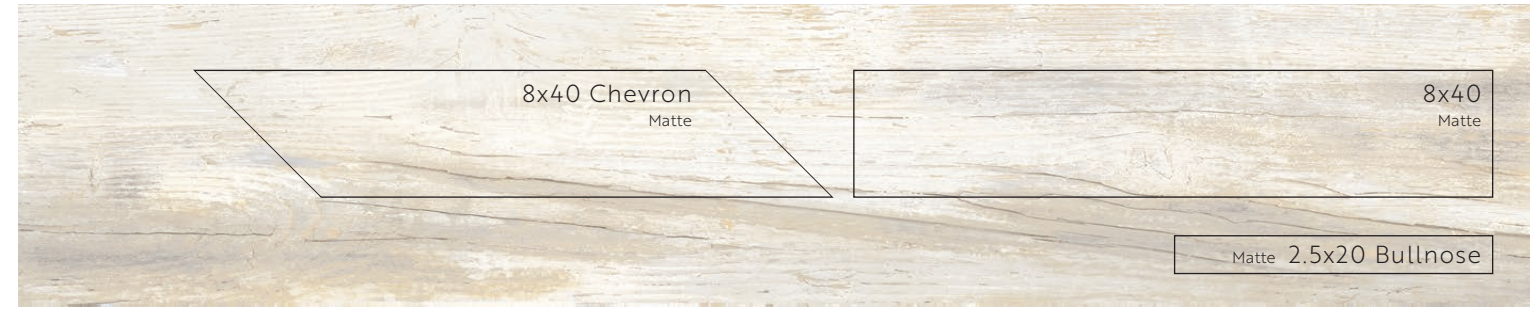

DECORS



2.5x19 Listel Mosaic
on 10x19 Sheet
Matte

VARIATION





Wood Look

COLOR BODY • PORCELAIN

Enchant



COLORS, SIZES & AVAILABILITY

NOMINAL SIZE	FINISH	THICKNESS	GROUT JOINT	MYSTIC	OASIS	SPARK
8 x 40 Rectified	Matte	9 mm	1/8"	✓	✓	✓
8 x 40 Chevron Rectified	Matte	9 mm	1/8"	⊘	⊘	⊘
2.5 x 19 Listel Mosaic	Matte	9 mm	N/A	⊘	⊘	⊘
2.5 x 20 Bullnose	Matte	9 mm	1/8"	⊘	⊘	⊘

✓ Stock Item. ⊘ Non-Stock Item. Requires Extra Lead Time.

TECH INFO

R = Residential, LC = Light Commercial, C = Commercial

<p>ORIGIN: USA</p> <p>SHADE VARIATION: V3 - Moderate Variation</p> <p>WEAR RATING: Class 5 - Rated for all residential and commercial applications</p> <p>It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile.</p>	RECOMMENDED APPLICATIONS	R	LC	C
	FLOORS	●	●	●
	WALLS / BACKSPASH	●	●	●
	POOL DECKING	*	*	*
	EXTERNAL USE - FROST PROOF	*	*	*

● Approved for this application. * Discuss proper installation method with your Sales Representative.

TILE PERFORMANCE DATA

TECHNICAL FEATURE	NORMS	RESULTS
Water Absorption	ASTM C373	≤ 0.5 %
Breaking Strength	ASTM C648	≥ 250 lbs
Dynamic Coefficient of Friction Wet	AcuTest	0.42
Thickness Dimension	ASTM C499	In accordance
Facial Dimension	ASTM C499	In accordance
Warping Diagonal	ASTM C485	In accordance
Wedging	ASTM C502	In accordance
Frost Resistance	⊘ ASTM C1026	Frost Proof
Scratch Hardness	MOHS	6



VIEW WEBPAGE

Floor & Accent Wall // ENCHANT MYSTIC 8X40



BEST  **TILE**®

BESTTILE.COM

MARYLAND | MASSACHUSETTS | NEW JERSEY | NEW YORK | NORTH CAROLINA | PENNSYLVANIA | RHODE ISLAND | VERMONT | VIRGINIA