

# Cava | Ceramic / Porcelain



## AVAILABLE SIZES

4x12 Wall

4x12

12x12

12x24

10x22 Wall

10x22 Wave Wall

2x2 Mosaic  
on 13x13 Sheet

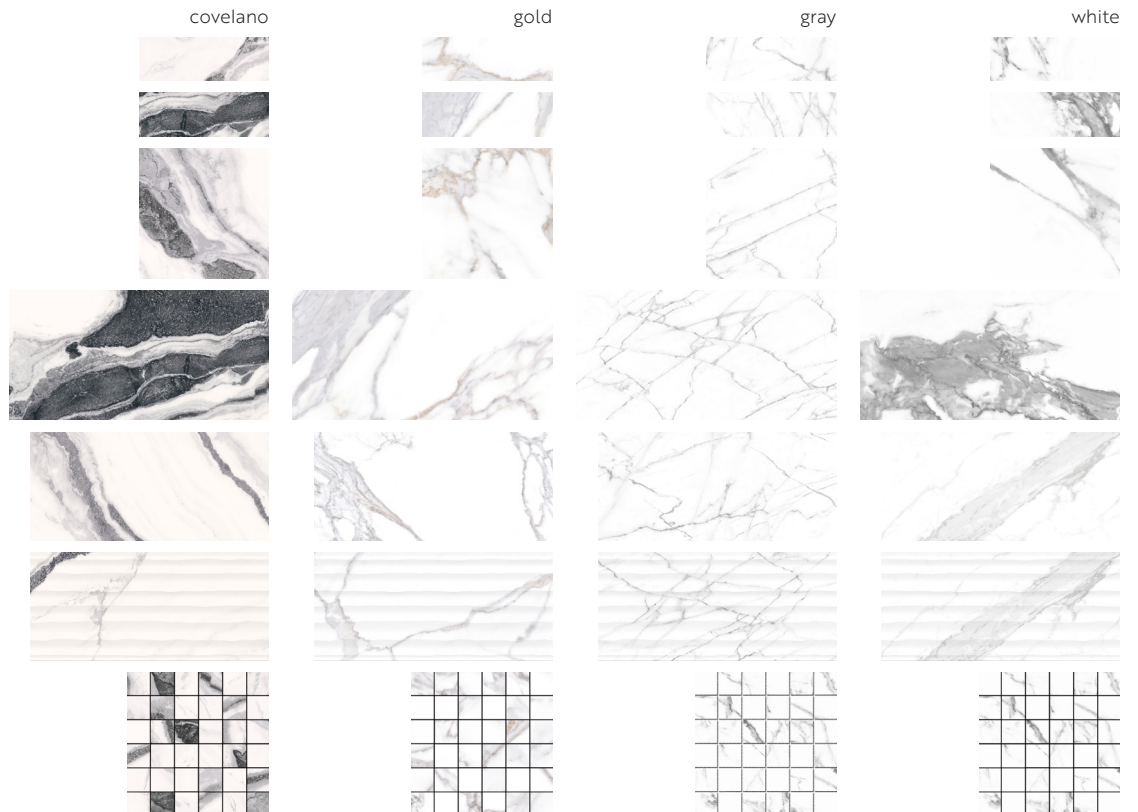
3x10 Wall  
Bullnose

4x12 Bullnose

## DESCRIPTION








Cava is a premier porcelain tile series that offers the look of four white marble tiles and the elegance of Italian marble settings. Porcelain floor tiles in 12" x 12", 12" x 24" and 4" x 12" formats combine with elegant ceramic wall tile options in 10" x 22" or 4" x 12" sizes. Cava's realistic interpretation of Venatino Marble, Statuario Marble, Calacatta Marble and Covelano Marble come to life across matte and shiny finishes. A series of brilliant white stone looks with the ease and durability of porcelain tiles.

## COLORS





# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Material	Thickness
4 x 12 Glossy Wall		Ceramic	8 mm
4 x 12		Porcelain	8 mm
12 x 12		Porcelain	8 mm
12 x 24		Porcelain	8 mm
10 x 22 Glossy Wall		Ceramic	8 mm
10 x 22 Glossy Wave Wall		Ceramic	8 mm
2 x 2 Mosaic		Porcelain	8 mm

## COORDINATING TRIM

Nominal	Shape	Material	Thickness
3 x 10 Glossy Wall Bullnose		Ceramic	8 mm
4 x 12 Bullnose		Porcelain	8 mm

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	FLOOR TILE ONLY
Water Absorption	C373	≤ 0.5 %
PEI Abrasion Resistance (Glazed)	CI027	4 / 5
Breaking Strength	C648	≥ 140 kN
Bond Strength	C482	≥ 50 psi
Dynamic Coefficient of Friction Wet	AcuTest	≥ 0.42
Thickness Dimension	C499	In Accordance
Facial Dimension	C499	In Accordance
Warpage Diagonal	C485	In Accordance
Wedging Average	C502	In Accordance
Frost Resistance	CI026	Frost Proof
Chemical Resistance	C650	GL: GA, GLA

## SHADE VARIATION



V2 - SLIGHT VARIATION  
Clearly distinguishable differences in texture and/or pattern within similar colors.

## WEAR CODE

10x22 / 4x12 glossy / 3x10 Bullnose: 1 - Rated for wall applications only.  
Covelano Floor: 4 - Rated for all residential and light commercial applications.  
Gray / White / Gold Floor: 5 - Rated for all residential and commercial applications.

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS	X	X Covelano Floor	X Gray/White/Gold Floor
WALLS / BACKSPLASH	X	X	X
POOL DECKING			
EXTERNAL USE - FROST PROOF	*	*	

X - Has been approved for this application.  
\* - Discuss proper installation method with your Sales Representative.

## NOTES

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.