

# New York | Ceramic




## AVAILABLE SIZES



## DESCRIPTION

New York is an appealing selection of color and design elements for any 4" x 12" ceramic wall tile project. This subway tile series brings seven glossy colors and two matte colors to your wall tile application. It also offers a very exciting decorative tile option in 6 patterns. This glazed ceramic wall tile offers a rectangular tile option that is modern in its color uniformity, with a consistent effect, low variation monochromatics, appealing American colors, and an exciting mix of decorative tile elements.


## GLOSSY COLORS

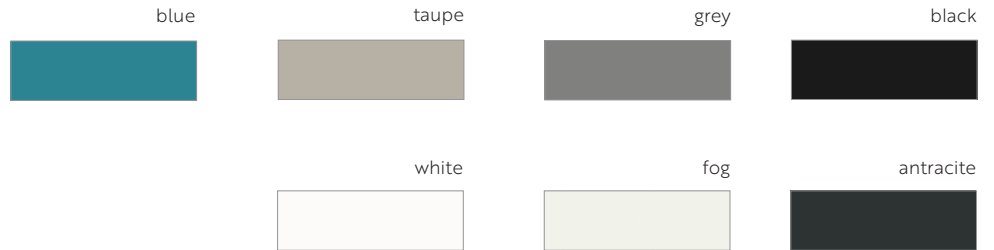

## MATTE COLORS



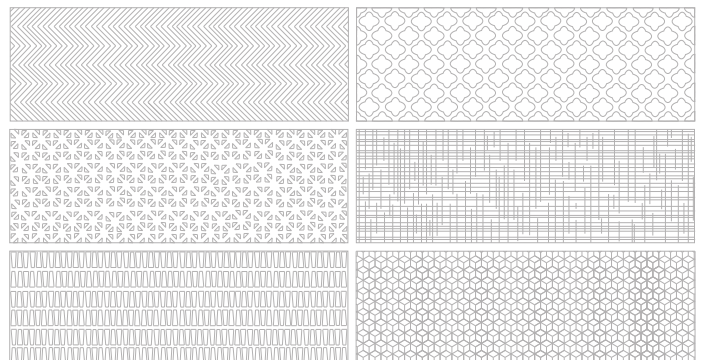


## GLOSSY DECO MIX COLORS (6 RANDOM DESIGNS) AVAILABLE COLORS: WHITE, FOG, & ANTRACITE





# TECHNICAL INFORMATION

## TILE SIZES

Nominal	Shape	Finish	Thickness	Availability
4 x 12		Glossy	8 mm	✓
4 x 12		Matte	8 mm	✓
4 x 12 Deco Mix		Glossy	8mm	✓

## COORDINATING TRIM

Nominal	Shape	Finish	Thickness	Availability
4 x 12 Bullnose		Glossy	8 mm	✓
4 x 12 Bullnose		Matte	8 mm	✓

✓ Stock Item.    ⚠ Non-Stock Item. Requires Extra Lead Time.

## PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ASTM C373	18 < w.a. < 20%
Abrasion Resistance	ASTM C1027	1
Breaking Strength	ASTM C648	≥ 0.50 kN
Bond Strength	ASTM C482	≥ 50 psi
Thickness Dimension	ASTM C499	In Accordance
Facial Dimension	ASTM C499	In Accordance
Warpage Diagonal	ASTM C485	In Accordance
Wedging	ASTM C502	In Accordance
Chemical Resistance	ASTM C650	GA/GLA

## SHADE VARIATION



VI - UNIFORM APPEARANCE  
Differences among pieces from the same production run are minimal.

## WEAR CODE

1 - Rated for wall applications only

## APPLICATIONS

	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
FLOORS			
WALLS / BACKSPLASH	✗	✗	✗
POOL DECKING			
EXTERNAL USE - FROST PROOF			

✗ - Has been approved for this application.  
\* - Information is available upon request.

## NOTES

Minimum Grout Joint Recommendation: 3/16"

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.